

भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS

Draft For Comments Only

(Not to be reproduced without permission of BIS or used as Standard)

भारतीय मानक मसौदा

भुकृत्रिम नालियों के दीर्घकालिक प्रवाह का निर्धारण

Draft Indian Standard

DETERMINATION OF LONG TERM FLOW OF GEOSYNTHETIC
DRAINS

ICS : 59.080.70

Geosynthetics Sectional
Committee, TXD 30

Last date for receipt of comments is
23 September 2025

NATIONAL FOREWORD

(Formal clauses will be added later)

This Indian Standard intended to be adopted is identical with ISO/TS 18198 : 2023 'Determination of long-term flow of geosynthetic drains' issued by the International Organization for Standardization (ISO).

The conditioning temperature of $(20 \pm 2) ^\circ\text{C}$ as specified in International Standard is not suitable for tropical countries like India where the atmospheric temperature is normally much higher than $20 ^\circ\text{C}$. It is almost impossible to maintain this temperature specially during summer when the atmospheric temperature rises even up to $50 ^\circ\text{C}$. In view of the above, IS 6359 : 2023 'Method for conditioning of textiles (first revision)' which specifies a temperature of $(27 \pm 2) ^\circ\text{C}$ for conditioning of the test specimens for the tropical countries like India shall be referred.

The text of ISO Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In the standard intended to be adopted, reference appears to certain International Standard for which Indian Standards also exist. The corresponding Indian Standard which are to be

substituted in their respective places are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 10318-1 Geosynthetics — Part 1: Terms and definitions	IS 13321 (Part 1) : 2022 Geosynthetics (Part 1) : Terms and definitions (<i>first revision</i>)	Identical

In reporting the result of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS 2 : 2022 ‘Rules for rounding off numerical values (*second revision*)’.

EXTRACT OF ISO/TS 18198 : 2023 DETERMINATION OF LONG-TERM FLOW OF GEOSYNTHETIC DRAINS

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.


This document was prepared by Technical Committee ISO/TC 221, *Geosynthetics*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The most commonly used drainage geosynthetics are the geocomposites which are produced by laminating one or two geotextiles, with a filter function, onto a drainage core. Examples are included in [Figure 1](#).

Figure 1 — Examples of drainage cores

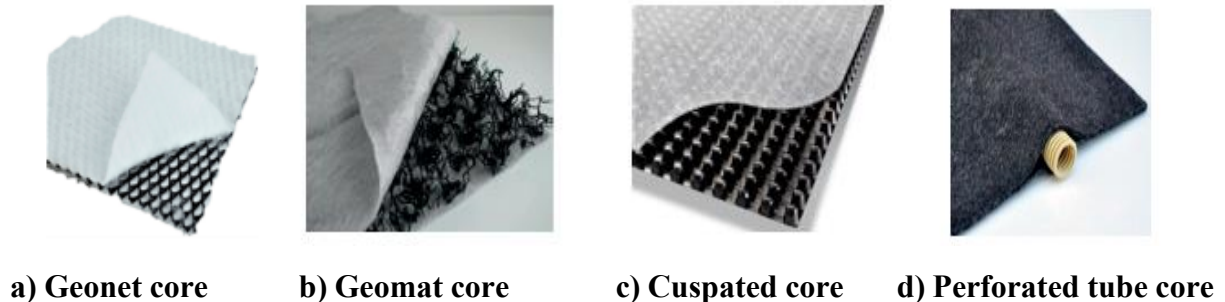

The components generally have the following characteristics under operating conditions:

- filtering component:
 - adequate permeability to gases and liquids in the direction perpendicular to the filter plane;
 - retention capacity of the soil particles;
- drainage core:
 - adequate permeability to gases and liquids in the direction planar to the drainage structure;
 - adequate compressive strength and creep resistance for the loads to be applied.

The geocomposites are often defined by the drainage cores: geomats (GMA), geonets (GNT), geospacers (GSP), multi-linear drains.

1 Scope

This document specifies methods of deriving reduction factors for geosynthetic drainage materials to account for intrusion of filter geotextiles, compression creep, and chemical and biological degradation. It is intended to provide a link between the test data and the codes for design with geosynthetic drains.

The geosynthetics covered include those whose primary purpose is planar drainage, such as geonets, cuspated cores only, or cuspated cores combined with laminated filter geotextiles, and drainage liners, where the drainage core is made from polypropylene and high-density polyethylene. The majority of geosynthetic drains are geocomposites with geotextiles laminated to a drainage core and it is important, where possible, to consider the drainage behaviour of the geocomposite as a whole rather than the behaviour of the component parts in isolation.

This document does not cover the strength of overlaps or joints between geosynthetic drains nor whether these might be more or less durable than the basic material. It does not apply to

geomembranes, for example, in landfills. It does not cover the effects of dynamic loading nor any change in mechanical properties due to soil temperatures below 0 °C, or the effects of frozen soil. This document does not cover uncertainty in the design of the drainage structures, nor the human or economic consequences of failure. Design guidance for geosynthetic drains is found in ISO/TR 18228-4.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- ISO 10318-1, *Geosynthetics — Part 1: Terms and definitions*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 10318-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

FORMAT FOR SENDING COMMENTS ON BIS DOCUMENTS

(Please use A4 size sheet of paper only and type within fields indicated. Comments on each clause/sub clause/table/fig etc. be started on a fresh box. Information in column 3 should include reasons for the comments and suggestions for modified working of the clauses when the existing text is found not acceptable. Adherence to this format facilitates Secretariat's work)

Please e-mail your comments to txd@bis.gov.in

NAME OF THE COMMENTATOR/ORGANIZATION:

DOCUMENT NO: TXD 30 (28444) WC

BIS LETTER REFERENCE NO. : TXD 30 (28444)

Item, Clause Sub-Clause No. Commented upon (Use Separate Box afresh)	Comments	Specific Proposal (Draft clause to be add/amended)	Remarks	Technical References and justification on which (2), (3), (4) are based

(1)	(2)	(3)	(4)	(5)